




MODEL—HPWW 5 MS 120 GT

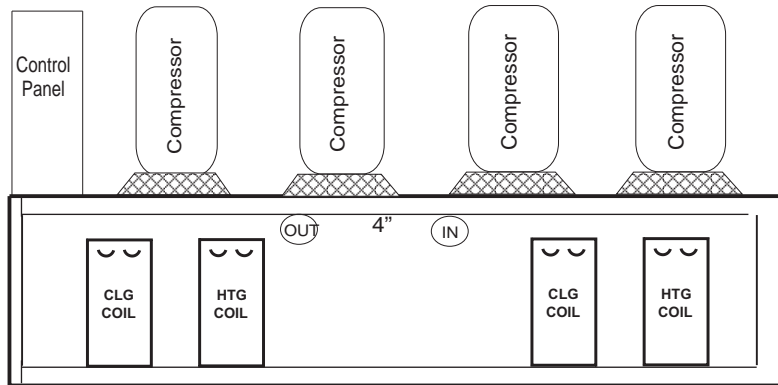


Right Side

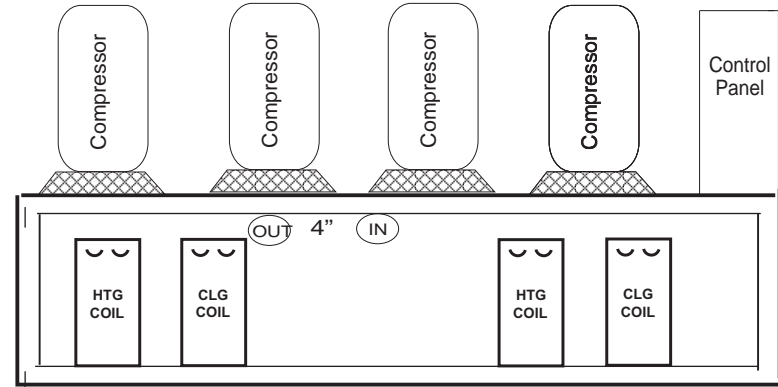

Left Side

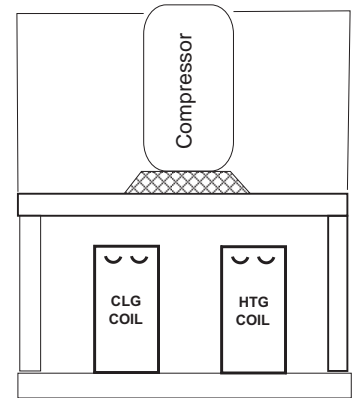

Back

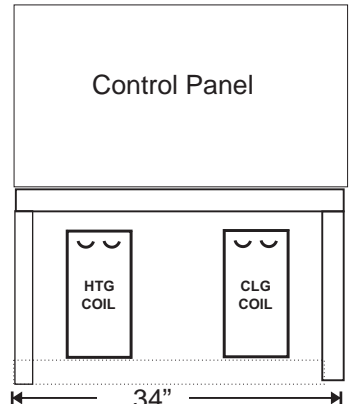

Note: In View of Continuous Product Improvements, design and specification are subject to change without Notice

Heating Capacity	1,586.4 MBTUH
Condenser Water Flow	300 GPM
Pressure Drop (cond.)	5.2 PSI
Entering Water Temp.	100
Leaving Water Temp.	110.58
COP	5.8
Compressors	(8) SZ-185 Maneurop Scroll
Voltage	460/60/3Ø
RLA/LRA	22.3/175 ea.
Control Voltage	24 Volts
Minimum Circuit Amp.	30 each compressor

Cooling Capacity	1,312.8 MBTUH
Evaporator Water Flow	250 GPM
Pressure Drop (Evap.)	7.1 PSI
Entering Water Temp.	65.0
Leaving Water Temp.	54.70
Cooling EER	25.35
Condensers	Double Wall Vented
Condenser. Construction	Welded Plate
Evaporator	Welded Plate
Refrigerant Type	R-134A
Minimum Unit Amperage.	300 Amp.

STANDARD FEATURES

- | | |
|-----------------------------------|---|
| Liquid Line Sight Glass | Refrigerant Charging Valves |
| Refrigerant Dryer | Hinged Control Panel |
| Thermostatic Expansion Valves | Refrigerant Holding Charge |
| Insulated Evaporator & Ref. Lines | Minimum Off Time for Compressors |
| Time Delay each Compressors | High Side Pressure Control (Mechanical) |
| Compressor Lock Out Relay | Low Side Pressure Control (Mechanical) |
| Single Phase/Voltage Protection | Fused Protection on each compressor |
| Vibration Isolation on Compressor | Current Over Load Relays |

Options

- Four Year Extended Compressor Warranty
- Five Year Parts and Labor Warranty
- Compressors Rotalock Service Valves
- Crankcase Heaters
- Refrigerant Pump Down Solenoid Valves
- Micro-Processor Based Control System
- Stinles Steel Plate Evaporators

Heat Harvester Energy Efficient Products

Manufactured by

H H Systems, Inc.

