





HPWW 5 MS 150 GT

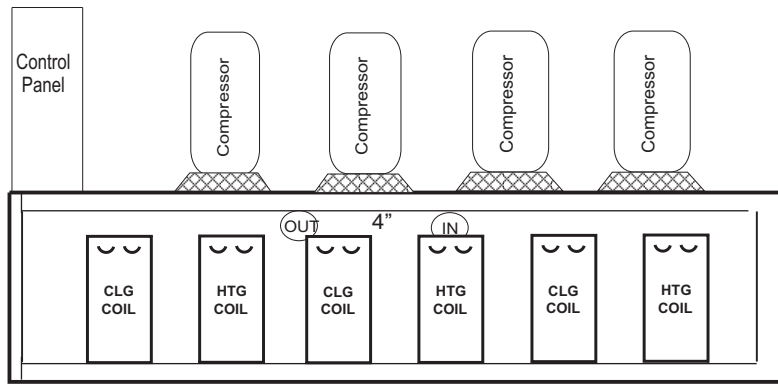

Right Side

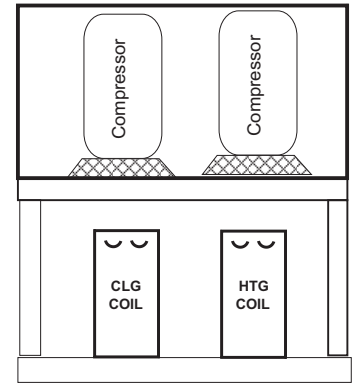

Back

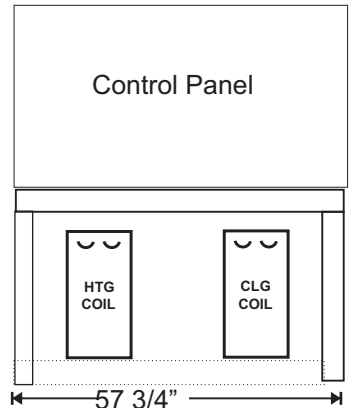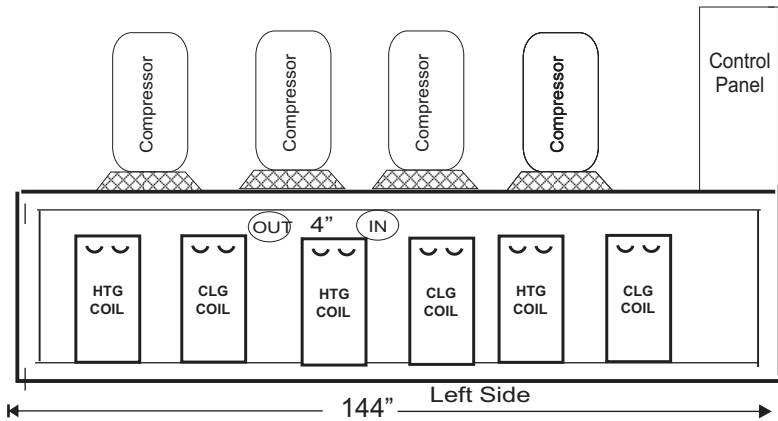

Note: In View of Continuous Product Improvements, design and specification are subject to change without Notice

Heating Capacity	2,677.9 MBTUH
Condenser Water Flow	500 GPM
Pressure Drop (cond.)	5.2 PSI
Entering Water Temp.	100
Leaving Water Temp.	110.72
COP	5.46
Compressors	(6) SZ-300 Maneurop Scroll
Voltage	460/60/3□
RLA/LRA	49.3/ ea.
Control Voltage	24 Volts
Minimum Circuit Amp.	60 Ams

Cooling Capacity	2,187.7 MBTUH
Evaporator Water Flow	400 GPM
Pressure Drop (Evap.)	7.1 PSI
Entering Water Temp.	65.0
Leaving Water Temp.	54.06
Cooling EER	15.23
Condensers	Double Wall Vented
Condenser. Construction	Welded Plate
Evaporator	Welded Plate
Refrigerant Type	R-134A
MCA	310 Amp.

STANDARD FEATURES

Liquid Receiver	Liquid Line Dryer
Compressors Service Valves	Thermostatic Expansion Valves
Liquid Line Sight Glass	Hinged Control Panel
Compressor Adjustable Time Delay Relay	Compressor Rotation Control
Single Phase Protection	High Side Pressure Control (Mechanical)
Condenser Flow Switch Relay	Low Side Pressure Control (Mechanical)
Evaporator Flow Switch Relay	Fused Protection on each compressor

Options

Four Year Extended Compressor Warranty
 Warranty for all Parts & Labor Year 2 - 5
 Micro-Processor Based Control System
 Crankcase Heaters
 Refrigerant Pump Down Solenoid Valves
 Condenser Water Circulating Pump for each Refrigerant Circuit

Heat Harvester Energy Efficient Products
 Manufactured by
H H Systems, Inc.

