




Right Side

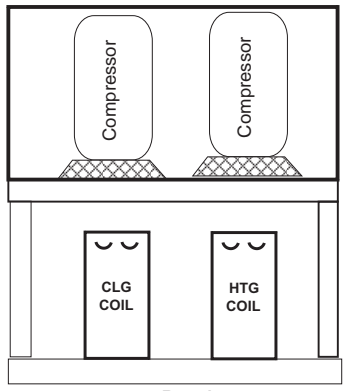

Back

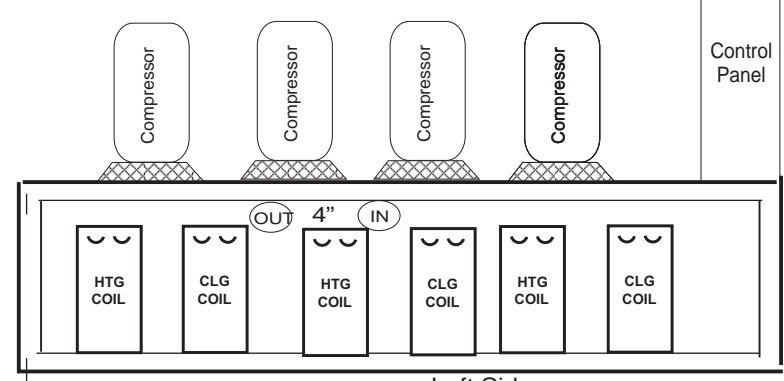

Left Side

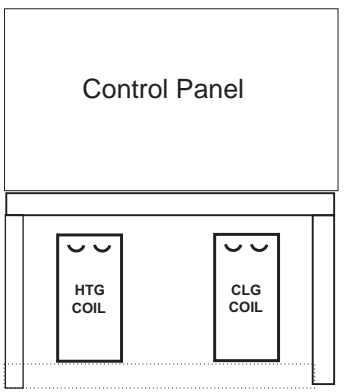

57 3/4"

MODEL—HPWW 5 MS 200 GT

Note: In View of Continuous Product Improvements, design and specification are subject to change without Notice

Heating Capacity	2,677.9 MBTUH	Cooling Capacity	2,187.74 MBTUH
Condenser Water Flow	500 GPM	Evaporator Water Flow	400 GPM
Pressure Drop (cond.)	5.2 PSI	Pressure Drop (Evap.)	7.1 PSI
Entering Water Temp.	100	Entering Water Temp.	65.0
Leaving Water Temp.	110.72	Leaving Water Temp.	54.06
COP	5.45	Cooling EER	15.23
Compressors	(8) SZ-300 Maneurop Scroll	Condensers	Double Wall Vented
Voltage	460/60/3□	Condenser. Construction	Welded Plate
RLA/LRA	49.3/ ea.	Evaporator	Welded Plate
Control Voltage	24 Volts	Refrigerant Type	R-134A
Minimum Circuit Amp.	60 Ams	Minimum Unit Amperage.	410 Amp.

STANDARD FEATURES

Options

- | | | |
|--|---|---|
| Liquid Receiver | Liquid Line Dryer | Four Year Extended Compressor Warranty |
| Compressors Service Valves | Thermostatic Expansion Valves | Warranty for all Parts & Labor Year 2 - 5 |
| Liquid Line Sight Glass | Hinged Control Panel | Micro-Processor Based Control System |
| Compressor Adjustable Time Delay Relay | Compressor Rotation Control | Crankcase Heaters |
| Single Phase Protection | High Side Pressure Control (Mechanical) | Refrigerant Pump Down Solenoid Valves |
| Condenser Flow Switch Relay | Low Side Pressure Control (Mechanical) | Condenser Water Circulating Pump for each Refrigerant Circuit |
| Evaporator Flow Switch Relay | Fused Protection on each compressor | |

Heat Harvester Energy Efficient Products
 Manufactured by
H H Systems, Inc.

