


# E-60

Back

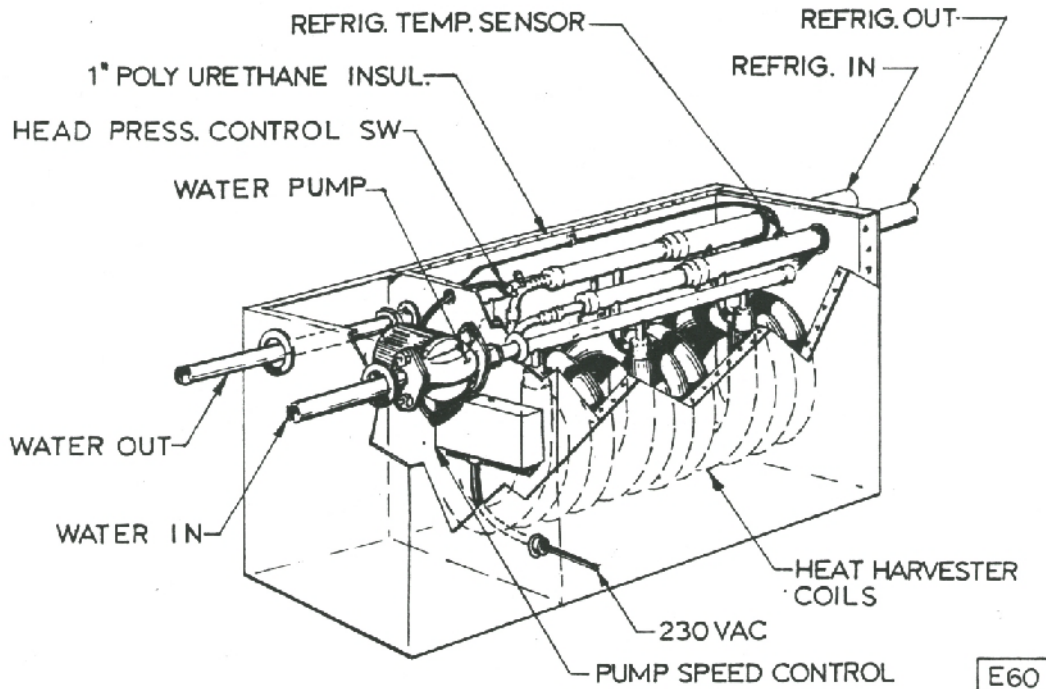

## Performance and Component Data

- 1. E-60** Use with commercial R-22 - 25 through 30 ton refrigerant circuit.  
or with R-134A 17.5 through 22.5 ton refrigerant circuit.
- 2. Heat Exchanger Coil**  
Tube in Tube Exchanger  
Outside hot gas tube Steel Tested @ 450 PSI  
Inside tube Double Walled vented copper. UL Listed for potable water.  
Double wall with vent between walls isolates water from refrigerant. Tested 450 PSI  
Three coils parallel in balanced manifold to ensure proper refrigerant flow.
- 3. Water Circulation Pump**  
Grundfos or Taco Stainless Steel - 1/12 H.P.  
Single Phase - 208/230 volts - 60 HZ .80 amps.  
Water Lubricated Needs no oiling Overload Protected - UL Listed
- 4. Pump on/off Control**  
Head Pressure Control - Adjustable with 30 PSI differential  
Set @ 200 PSI for R-22 & @ 130 PSI for R-134A  
Manufactured by Alco.
- 5. Pump Speed Control**  
Variable speed control to regulate RPM of circulating pump in reference to head pressure. Manufactured by Alco.
- 6. Tubing Connections - Copper**  
Refrigerant 2 1/8" OD Water 1 3/8" OD
- 7. Dimensions** 17" X 24" X 38" **Weight** 185 Lbs.9

**Note:** In View of Continuous Product Improvements—design and specification are subject to change without Notice

Heat Harvester Energy Efficient Products  
Manufactured by  
Environmentally Engineered Equipment, Inc.